Ejector pin deburring tool

EPカッター





KREUZ Co.,Ltd. 株式会社クロイツ

EPcutterEjector pin deburring tool


Press and complete in 1 second

Simply press the EP cutter against the ejector pin mark for 1 second while rotating to complete the process.

With a floating mechanism built into a dedicated holder and a cutter with a special blade shape, removes burrs while leaving the material intact.








[After pin cutter deburring]

There are 3 types of dedicated holders

The EP cutter is used by attaching it to a special holder.

There are three types of dedicated holders, depending on the attachment method, so that they can be used for either type for Deburring Machines, Special Machines, NC Machines.

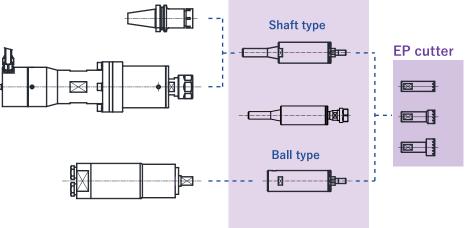

Economical because it is a cutter

[Special blade shape]

The special blade shape allows only the burrs to be removed, making it much longer-lasting and more economical than brush deburring.


The attachment to the holder is a screw-in type that can be easily replaced and can be attached to any holder.



【Shaking head type】 If uneven contact occurs due to distortion or jigs, this can be resolved by using the swing type.









EP-Φ16 AT Shaking head type






Dedicated holder






| Floating Direction & Capaciy | Weight | Max.rpm | Direction of rotation |
|------------------------------------|--------|-----------------------|-----------------------------|
| 5mm | 230g | 5000min ⁻¹ | right |

Install EP-Φ16








| Floating Direction & Capaciy | Weight | Max.rpm | Direction of rotation |
|------------------------------------|--------|-----------------------|-----------------------------|
| 5mm | 150g | 5000min ⁻¹ | right |

Install EP-Φ16 -

| 131 | → |
|------------|----------|
| ← | 50 |
| | |

TF-SC10



| Floating Direction & Capaciy | Weight | Max.rpm | Direction of rotation |
|------------------------------------|--------|-----------------------|-----------------------------|
| 5mm | 285g | 5000min ⁻¹ | right & left |

Use collet and collet nut

WWW.KREUZ.JP

KREUZ Co.,Ltd.

102-7 Jindoike, Noda-cho, Kariya-shi, Aichi 448-0803 JAPAN TEL+81-566-22-5263FAX+81-566-25-3339