





Deburring Tooling

Spindle Motor ■

Air scaler ■

Floting attachment ■

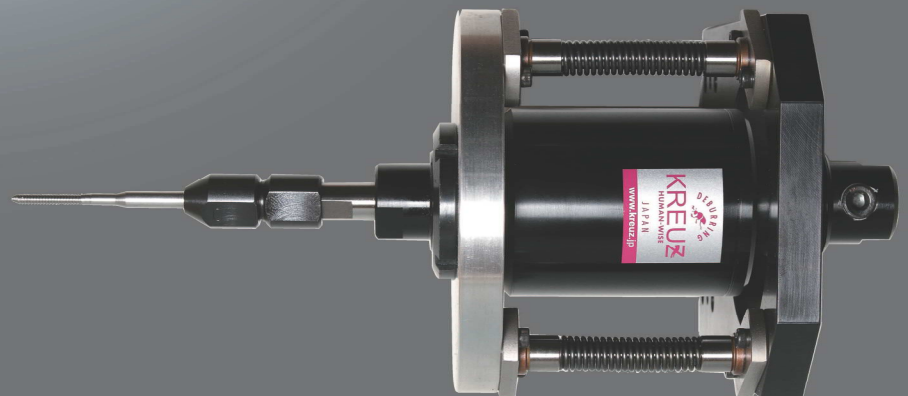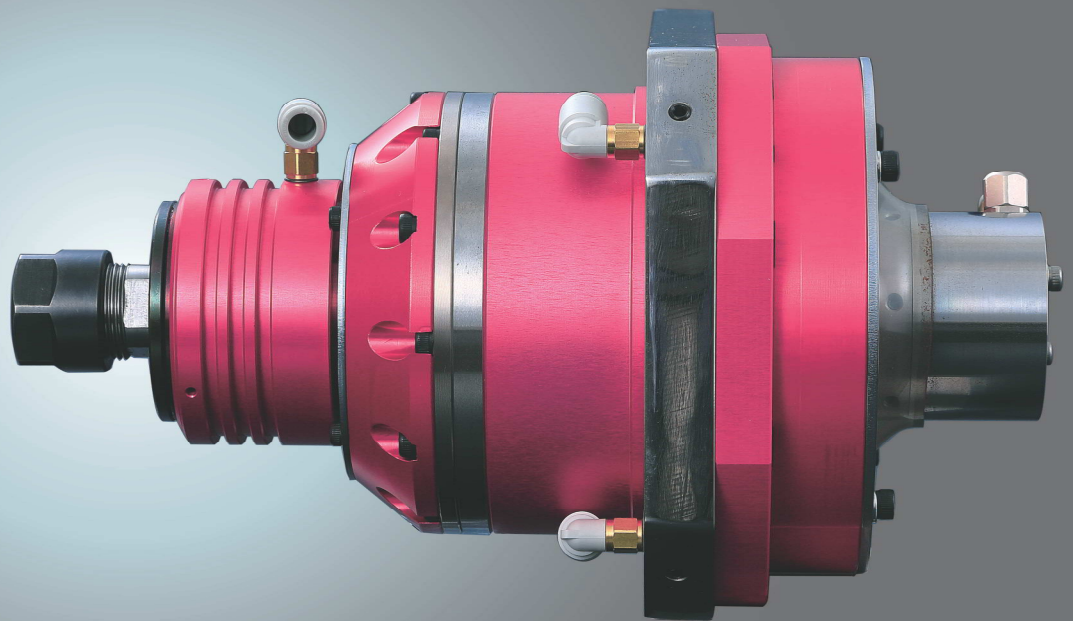


KREUZ Co.,LTD.

Tooling for deburring


There are various methods for deburring.
We provide spindle motors, air scalers and floating devices to perform deburring together with cutting tools, brushes and files.

Electric spindle motor

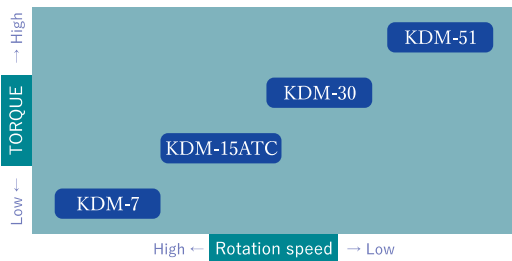

We have a lineup of drive tools that can handle various deburring such as fine burrs after machining using brushes, rough burrs of casting materials using $\Phi 200$ grindstone, and burrs that require multiple tools. All products can be used with Kreuz robots, general-purpose 6-axis robot, and various dedicated machines.

Air scaler <Air type reciprocating drive>

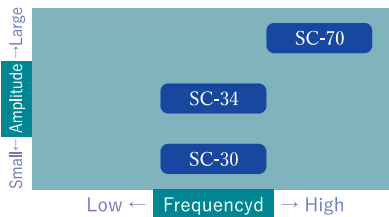

Air scaler is good for deburring large burrs which is difficult to deburr with rotary tools or filing deburring brittle materials burrs at the parting line of the sand core.

Dedicated floating device

	Where to use	Flowting attachments
Body mounting	KDM-7	FL-P
	KDM-30	KDM-30FS
	KDM-51	KDM-51SP
Tool installation	SC-70	FL-S
	SC-30	HL-T-002
	SC-34	HL-T-004

To automated deburring, it is required to perform deburring while chasing the shape of the material. The floating device is important for chasing performance, there are 2 types, one is used attaching with the machine directly, the other is use with attached to the tools.

- ※1 Main body mounting: The attachment which let drive tools itself possible to correspond to big burrs with pushing.
- ※2 Tool mounting: The holder which let operate deburring tools directly. It is possible to deburr at narrow position as interference of the jig is reduced.



Electric spindle motor

KDM-7

Small type spindle motor.

It can be used as a deburring spindle by attaching it to a robot or dedicated machine together with corresponding floating device.

Rated output (Kw)	Rated torque (Nm)	Maximum/minimum rotation speed (min ⁻¹)	Mass (kg)	Collet chuck nut
0.7	0.32	20,000 3,000	2.1	ER16

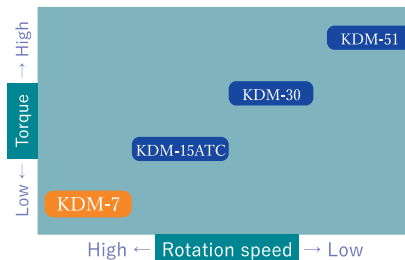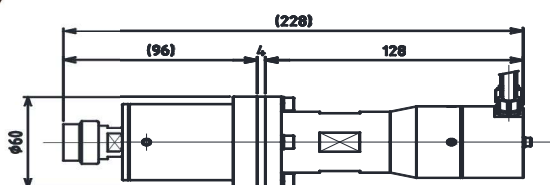

Specification


Construction	2 pieces of motor part and spindle part
Cooling air pressure	0.3MPa or less
Cooling air consumption	120L/min
Option	Collet chuck(Φ4.0mm~Φ10.0mm) Collet nut Dedicated spanner Power cable
Driver	Inverter Yaskawa Electric V1000 (Kreuz specifications)

Dedicated floating device

FL-P



Floating device for exclusive use of KDM-7. According to the burr size, you can change the pressing force by the air. The overload sensor can detect irregularities during deburring.

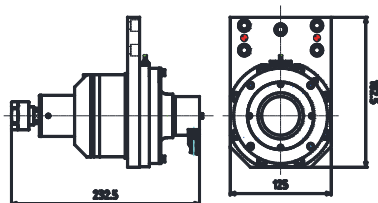

Specification




Construction	KDM-7 + FL-P
Total mass	7.5kg
Motion	Omnidirectional: 2 degree Axial direction: Press 5mm
Sensor	Overload sensor
Mechanism	Variable pressing force mechanism (air pressure)
Attachment	FL-P flange (Can be changed for each mounting destination)

KDM-15 ATC

BT30 spindle motor with ATC function.

A revolver type tool changer can also be provided.

Rated output (Kw)	Rated torque (Nm)	Maximum/minimum rotation speed (min ⁻¹)	Mass (kg)	Collet chuck nut
1.5	1.19	15,000 6,000	15	BT30

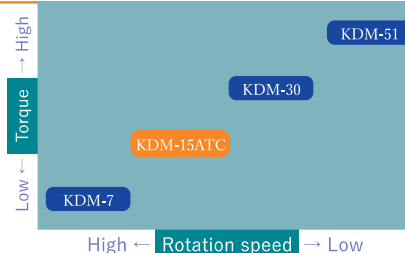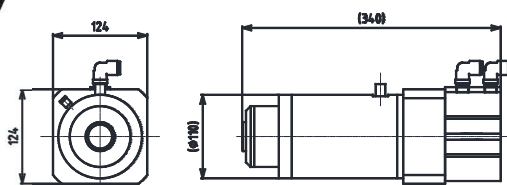

Specification

Construction	With automatic tool change function(ATC) Spindle Motor
Cooling air pressure	0.3MPa or less
Cooling air consumption	120L/min
ATC air pressure	0.7MPa
Collet holder	BT30
Pull stud	MAS1
Option	Collet chuck(Φ4.0mm~Φ10.0mm) Collet nut Dedicated spanner Power cable
Driver	Inverter Yaskawa Electric V1000 (Kreuz specifications)



Electric spindle motor

KDM-30



Double-headed spindle motor
Face mill and deburring are possible at the same time without tool changing built-in floating functioned spindle is attached at deburring side.

Rated output (Kw)	Rated torque (Nm)	Maximum/minimum rotation speed (min ⁻¹)	Mass (kg)	Collet chuck nut
3.0	2.9	10,000 5,000	20	Milling arbor ER20

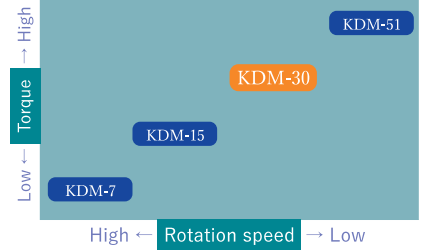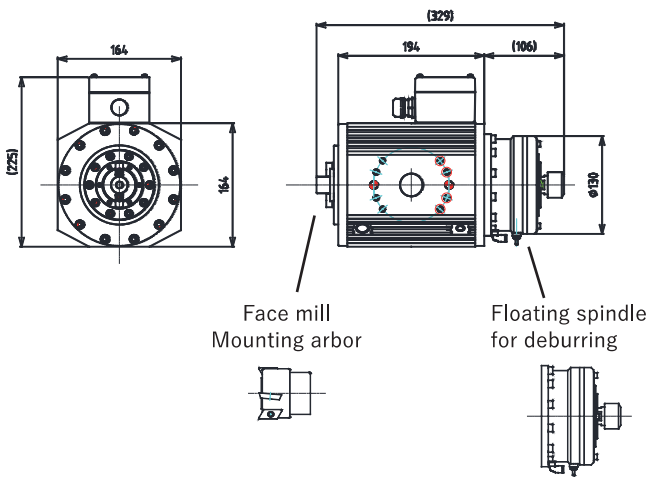


Double-sided spindle motor

Construction	Double-headed type (front milling cutter / deburring tool)
Cooling air pressure	Less than 0.3MPa
Cooling air consumption	360L/min
Maximum diameter of cooling milling cutter	360L/min Φ50mm
driver	Inverter Mitsubishi Electric (FR-E740-5.5K,FR-E840-5.5K-1)

Floating spindle for deburring<KDM-30FS>

Floating operation	Omnidirectional:2 degree Axial direction:3 mm
Sensor	Overload sensor
Option	ER20 Collet chuck(Φ4.0mm~Φ13.0mm) Collet nut Dedicated spanner Power cable


KDM-51





Double-headed spindle motor
Spindle tools can be mounted from three types: face mill, BT30, and ER collet chuck according to performance.

Rated output (Kw)	Rated torque (Nm)	Maximum/minimum rotation speed (min ⁻¹)	Mass (kg)	Spindle
5.0	9.0	6,000 3,000	35	Chose from 3 types

Motor parts

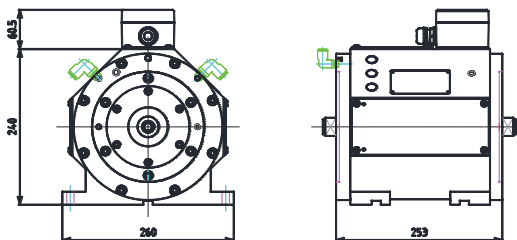

Spindle parts

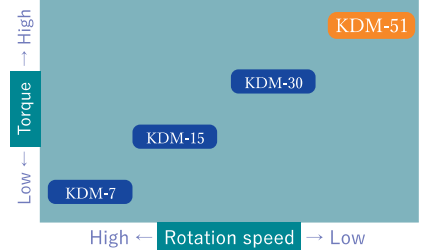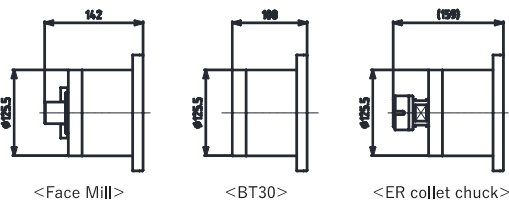

Double-sided spindle motor

Construction	Double-headed type (spindle selection)
Cooling air pressure	Less than 0.4MPa
Cooling air consumption	500L/min
Driver	Inverter Mitsubishi Electric (FR-A740-7.5K,FR-A840-7.5K-1)

Spindle



Face Mill Arbor	Φ25.4mm、Φ31.75mm、Φ50.8mm
BT30	Milling chuck
Collet chuck	ER25(max.Φ16mm)、ER32(max.Φ20mm)

Air scaler

SC-30



Frequency (Hz)	Amplitude (mm)	Mass (g)
150	1~1.5	150

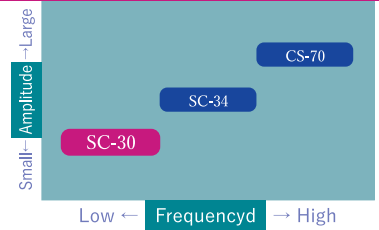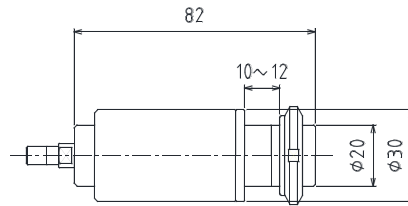


Specification

Air pressure	0.2MPa ~ 0.3MPa
Air consumption	25L/min
Fixed	Bearing nut

Dedicated floating attachment

HL-T-002

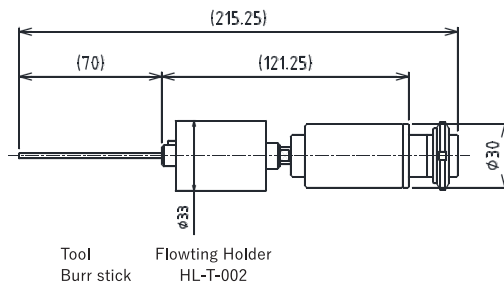

Tool Burr stick
Floating Holder HL-T-002

Specification



Scaler	SC-30
Flowing holder	HL-T-002
Tool	Burr stick (shank Φ 2.5mm)
Total mass	210g
Motion	Parallel Φ 10mm

SC-34

Dedicated for parting line processing of sand core products. It can use HL floater and burr stick.



Frequency (Hz)	Amplitude (mm)	Mass (g)
150	1~1.5	325

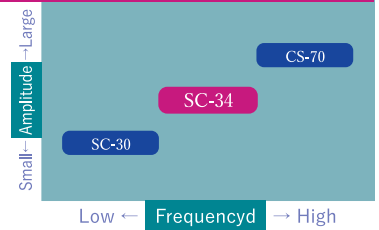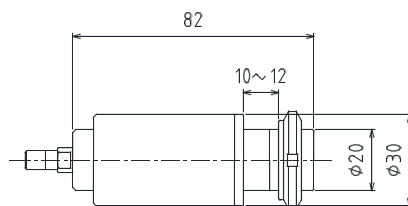


Specification

Air pressure	0.2MPa ~ 0.3MPa
Air consumption	25L/min
Fixed	Bearing nut

Tooling for core sand core

Burr stick + HL-T-004 + SC-34

Floating device exclusive use for SC-70 (FL-S)
The overload sensor can detect irregularities during deburring.

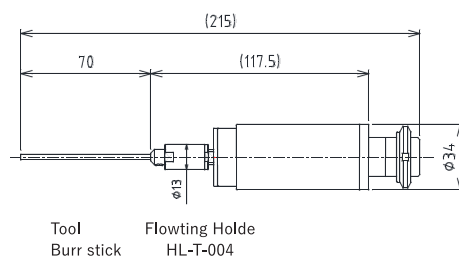

Tool Burr stick
Floating Holder HL-T-004

Specification


Scaler	SC-34
Flowing holder	HL-T-004
Tool	Burr stick (shank Φ 2.5mm)
Total mass	350g
Motion	Omnidirectional : 4 degree

SC-70


A special tool (N file) is attached to process thin burrs that easily stick to the wall surface, such as parting lines for aluminum die-cast products.



Frequency (Hz)	Amplitude (mm)	Mass (kg)
180	5	1.15

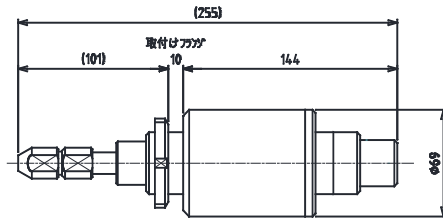

Small—Amplitude—Large




Specification

Air pressure	0.4MPa
Air consumption	50L/min
Tool holder	dedicated shape (nut type)

Dedicated floating device

FL-S


Floating device exclusive use for SC-70 (FL-S)
The overload sensor can detect irregularities during deburring.

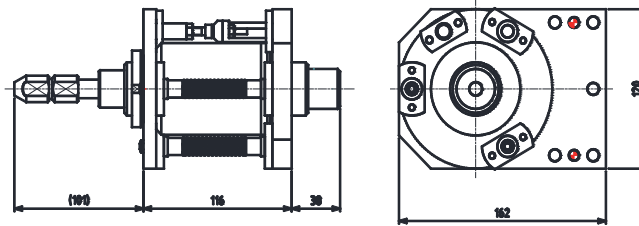

Specification

Construction	KSC-70 + FL-S
Total mass	4.2kg
Motion	Maximum Φ 10mm (Φ 5mm when overload detected)
Sensor	Overload sensor
Attachment	FL-S flange (can be changed for each mounting destination)

Product composition

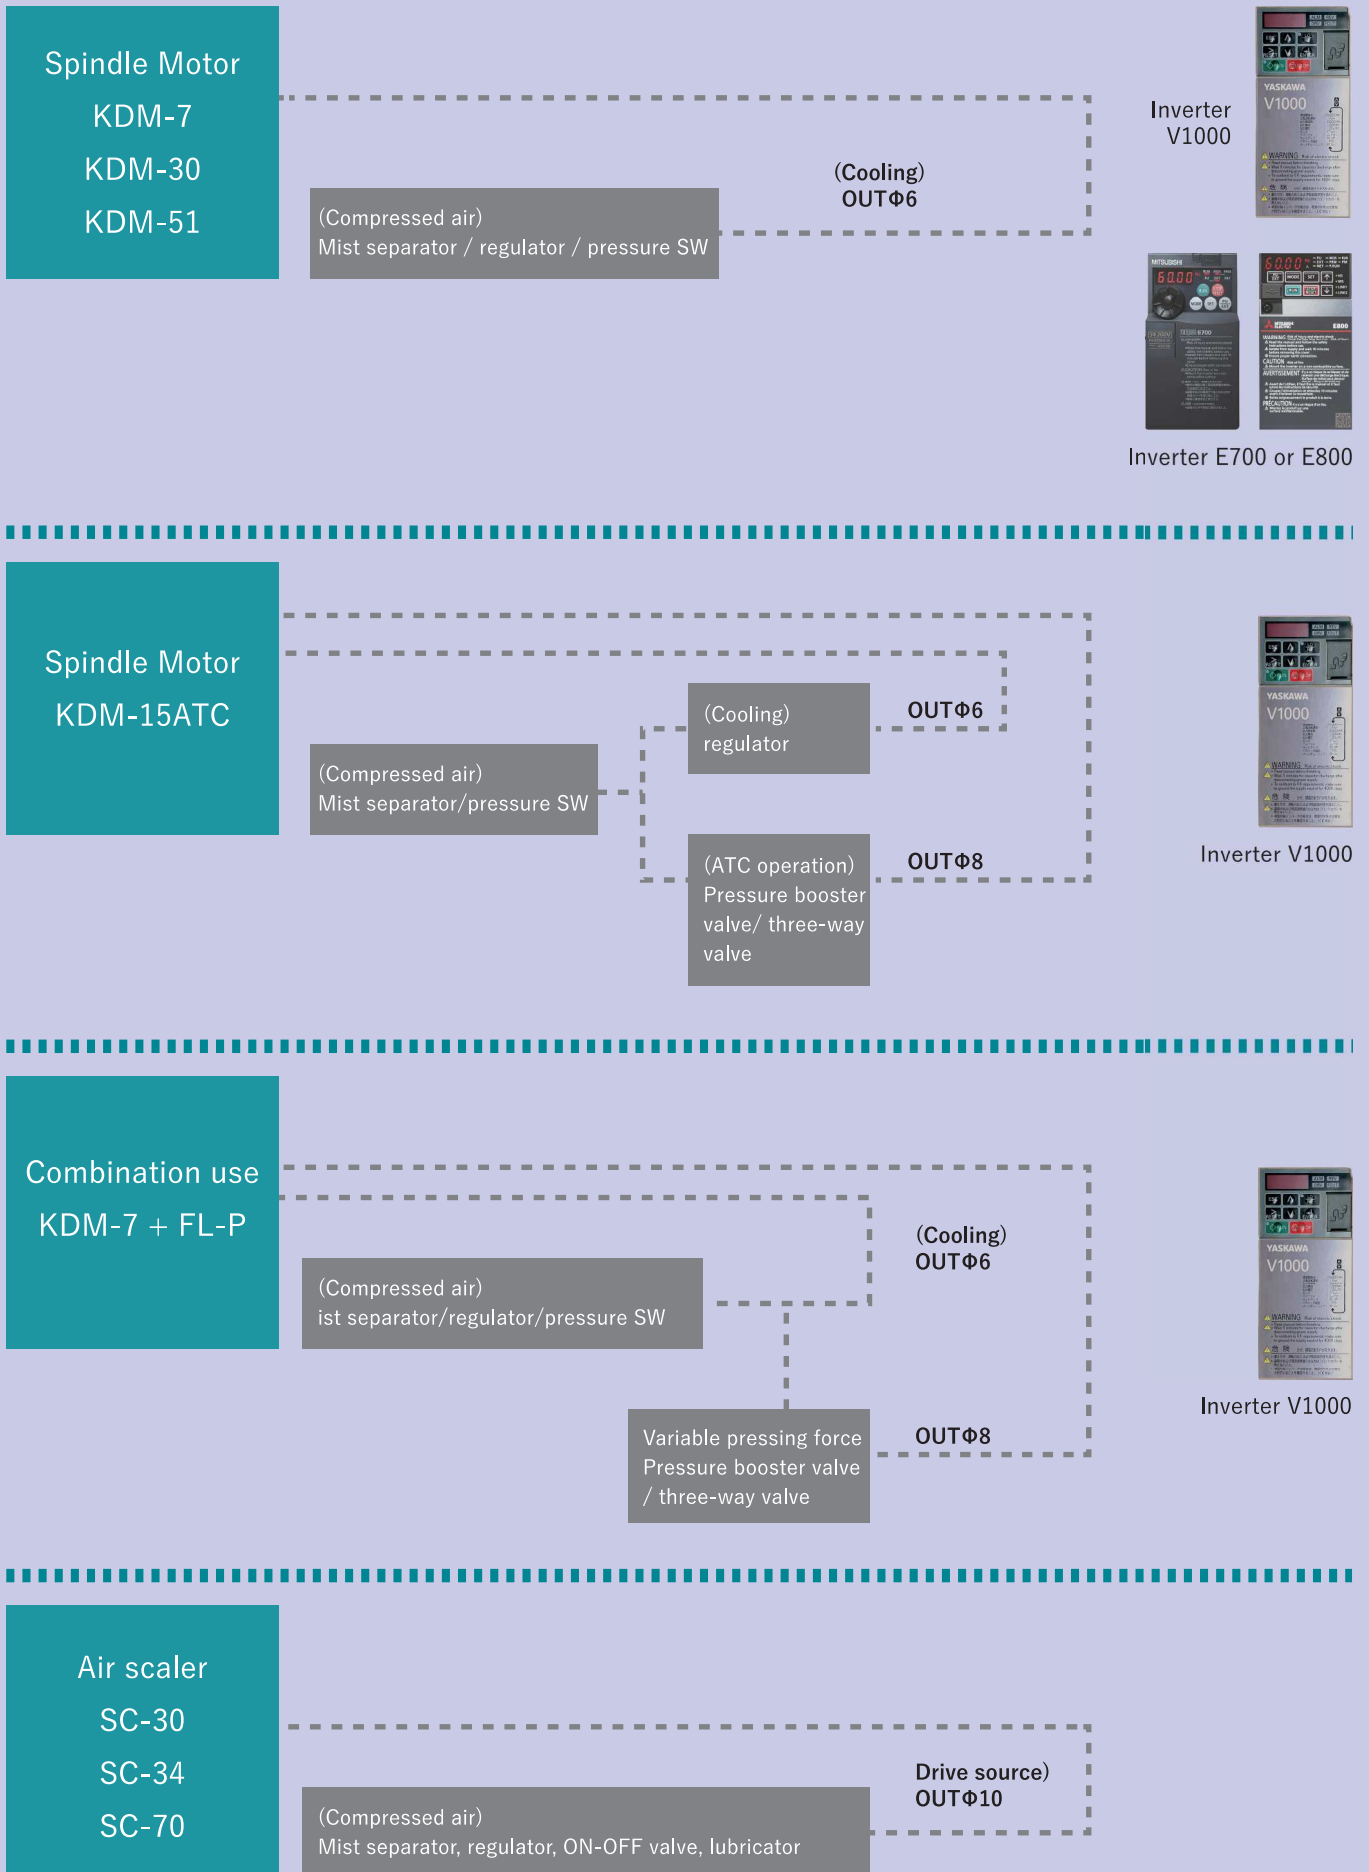



KREUZ Co.,Ltd

102-7 Jindoike, Noda-cho, Kariya, Aichi, 444-0803 JAPAN
TEL:+81-566-22-5263 FAX:+81-566-25-3339

※All rights reserved. 2021 KREUZ Co.,Ltd.

※Tool specifications are subject to change without notice.